
EXPERIMENTAL INVESTIGATION OF EGR AT VARIOUS FUEL SUBSTITUTIONS ON DUAL FUEL CI ENGINE

P.V.Ramana
Research scholar
JNTUA-Anantapur
ramanapendu@gmail.com

D.Maheswar
Professor
MNR institute of Technology
Sangareddy

B.UmamaheswarGowd
Professor
JNTU college of Engineering
Anantapur

Abstract-Many of the fuels that are been iterated by many researchers across the world as future fuel or alternate fuel as substitute for conventional diesel and petrol has their respective effect on the emissions. Gaseous fuels such as Hydrogen and CNG emits numerous amounts of oxides of nitrogen when combined with diesel. Recirculation of the part of exhaust gas has evident effect on the emissions of CI engine with less compensation of performance, when optimum amount of exhaust gas is inducted into the inlet manifold. In present research article, the effect of amount of exhaust gas recirculation is discussed for pure diesel and diesel with Hydrogen and CNG substitution.

Key Words-EGR, Diesel, Hydrogen, LPG, NO_x

I. INTRODUCTION

EGR is commonly used to reduce NO_x in S.I. engines as well as C.I. engines The theory of EGR is to recirculate about 10% to 25% of the exhaust gases back into the inlet manifold where it mixes with the fresh incoming air and this will reduce the quantity of Oxygen available for combustion [11]-[1]. This reduces the O₂ concentration and dilutes the intake charge, and reduces the peak combustion temperature inside the combustion chamber which will simultaneously reduce the NO_x formation. About 15% recycle of exhaust gas will reduce NO_a emission by about 80%. It should be noted that most of the NO_x emission occurs during lean mixture limits when exhaust gas recirculation is least effective. The exhaust gas which is sent into the combustion chamber has to be cooled so that the volumetric efficiency of the engine can be

increased. The exhaust gas for recirculation is taken through an orifice and passed through control valves for regulation of the quantity of recirculation [4]. Normally exhaust gas recirculation is shut off during idle to prevent rough engine operation. EGR is a very useful technique for reducing the NO_x emission. EGR displaces oxygen in the intake air and dilute the intake charge by exhaust gas re-circulated to the combustion chamber. Re-circulated exhaust gas lower the oxygen concentration in combustion chamber and increase the specific heat of the intake air mixture, which results in lower flame temperatures. It was observed that 15% EGR rate is found to be effective to reduce NO_x emission substantially without deteriorating engine performance in terms of thermal efficiency break specific fuel consumption (BSFC) and emissions. Thus, it higher rate of EGR can be applied at lower loads and lower rate of EGR can be applied at higher load. EGR can be applied to diesel engine fuelled with diesel oil, biodiesel, LPG, hydrogen, etc without sacrificing its efficiency and fuel economy and NO_x reduction can thus be achieved.[4] EGR is a useful technique for reducing NO_x formation in the combustion chamber. Exhaust gas consists of CO₂; N₂ and water vapours mainly. When a part of this exhaust gas is re-circulated to the cylinder, it acts as diluents to the combusting mixture. This also reduces the O₂ concentration in the combustion chamber. The specific heat of the EGR is much higher than fresh air; hence EGR increases the heat capacity (specific heat) of the intake charge, thus decreasing the temperature rise for the same heat release in the combustion chamber. Experimental investigation of EGR at various fuel substitutions on dual fuel CI engine as follows

II. EGR ON DIESEL FUEL:

Exhaust gas recirculation with various percentages on diesel fuel compression ignition engine and its NO_x emissions at various break powers and are plotted which are shown in the figure 1; with graphical representation and also without EGR and with different percentages of EGR un used oxygen with break power of diesel are plotted which are also shown in figure 2; thermal efficiency versus break power of diesel engine are shown in figure 3;

EGR ON DIESEL FUEL

EGR on diesel fuel engine with different substitutions of EGR and its related graphs shown in following figures

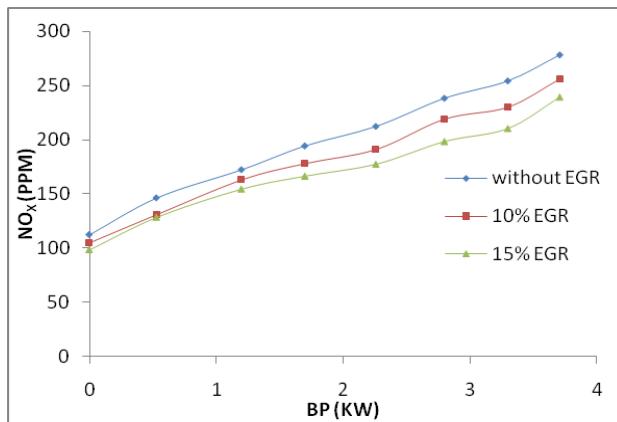


Figure1: NO_x Vs break power for pure diesel

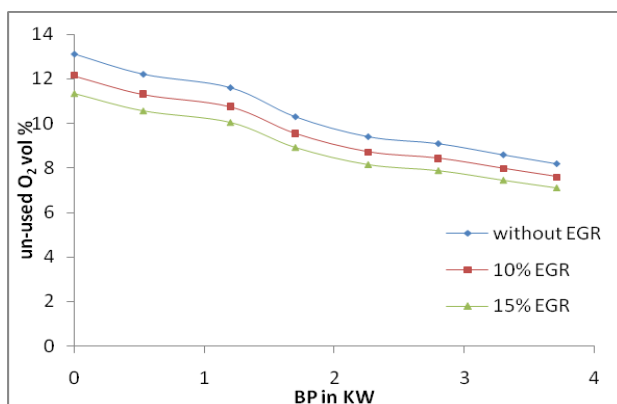


Figure2: Un-used Oxygen Vs brake power for pure diesel

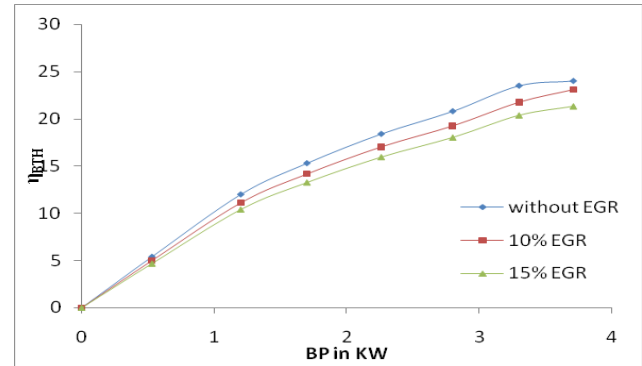


Figure 3: Thermal Efficiency Vs Brake Power for pure diesel

III. EGR ON HYDROGEN FUEL

Hydrogen has attained a position of prominent gaseous fuel in IC engine for the future generation because of its renewability. As it is a well known fact that many researches are in search of a renewable IC engine fuel that can be immediately substituted partially or completely without much modifications in the existing design of the engine. Hydrogen used in the CI engine by inducing in the inlet manifold along with air replacing diesel partially, this needs little modifications of the engine. Looking at the other side, the hydrogen usage comes with disadvantage of increased emissions of oxides of Nitrogen; this can be overcome recirculation of exhaust gas in selective and appropriate quantities. In present experimental investigation, emissions of oxides of nitrogen (NO_x) are compared at 10%, 20%, 30%, 40% and 50% v/v of hydrogen substitution at various percentages of exhaust gas recirculation.

EGR ON HYDROGEN FUEL

EGR on dual fuel engine with hydrogen as fuel and its experimental observations at different substitutions of EGR and its related graphs shown in the following figures

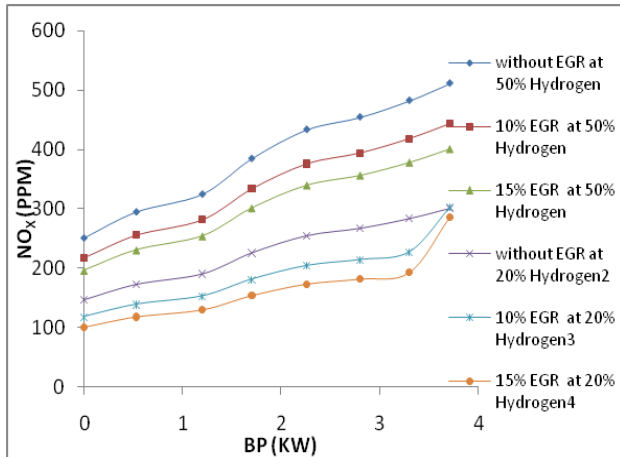


Figure 4: NOx Vs Brake power at various Hydrogen substitutions

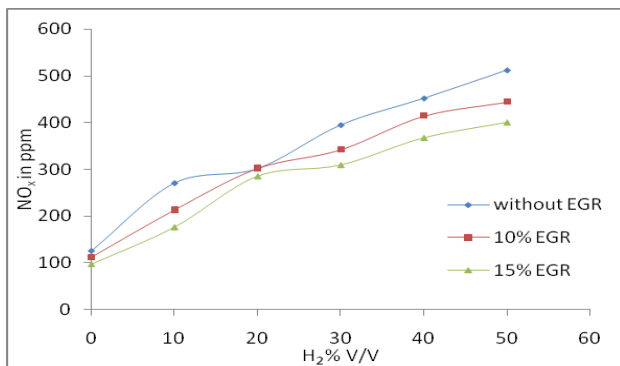


Figure 5: NOx Vs Brake power at various Hydrogen substitutions

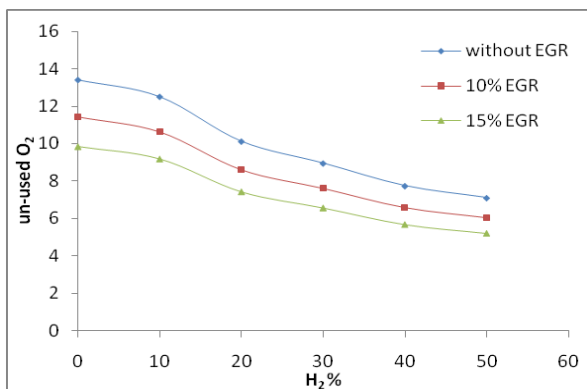


Figure 6 : Un-used oxygen Vs Brake power at various Hydrogen substitutions

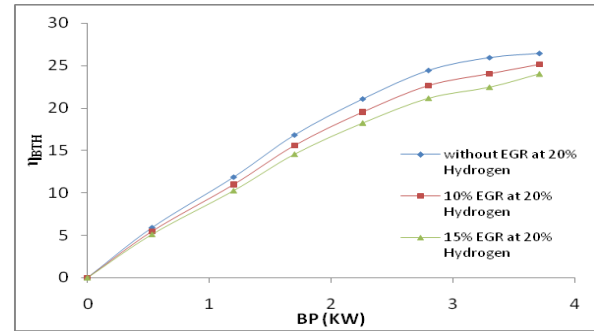


Figure7: Thermal Efficiency Vs Brake Power at Various Substitutions of Hydrogen

IV. EGR ON COMPRESSED NATURAL GAS

EGR at various substitutions of CNG Compressed Natural Gas (CNG) has become a better option as a clean burning fuel of an IC engine. In order to comply with the ever-stringent emission norms throughout the world and crunch in petroleum reserves, the modern day automobile industry is compelled to hunt for new and alternative means of fuel sources to keep the wheels spinning globally [4]. Paradoxical objectives of attaining simultaneous reduction in emission along with high performance has provided with a few alternative. Natural gas produces practically no particulates since it contains few dissolved impurities (e.g. sulphur compounds). Moreover, natural gas can be used in compression ignition engines (dual fuel diesel– natural gas engines) since the auto-ignition temperature of the gaseous fuel is higher compared to the one of conventional liquid diesel fuel [7]. Dual fuel diesel– natural gas engines feature essentially a homogeneous natural gas–air mixture compressed rapidly below its auto-ignition conditions and ignited by the injection of an amount of liquid diesel fuel around top dead centre position. Natural gas is fumigated into the intake air and premixed with it during the induction stroke. At constant engine speed, the fumigated gaseous fuel replaces an equal amount of the inducted combustion air (on a volume basis) since the total amount of the

inducted mixture has to be kept constant. Furthermore, under fumigated dual fuel operating mode, the desired engine power output (i.e. brake mean effective pressure) is controlled by changing the amounts of the fuels used. Thus, at a given combination of engine speed and load, the change of the liquid fuel “supplementary ratio” leads to a change of the inhaled combustion air, thus resulting to the alteration of the total relative air–fuel ratio [8].

EGR ON COMPRESSED NATURAL GAS

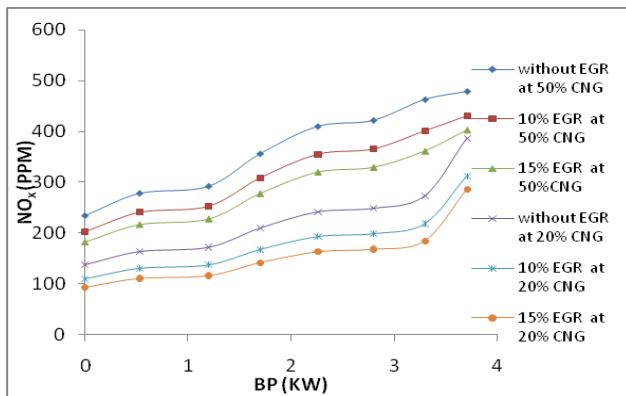


Figure 8: NO_x Vs Brake power at various CNG substitutions

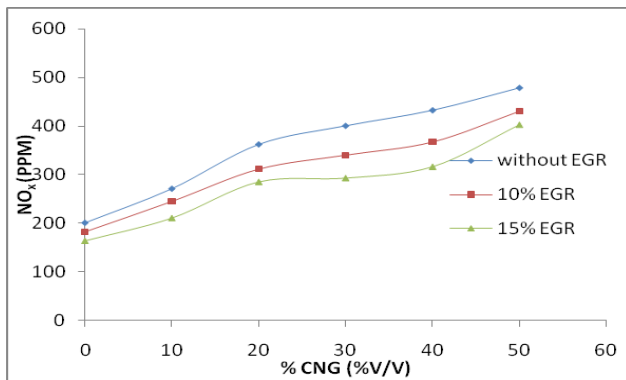


Figure 8: NO_x Oxygen Vs Brake power at various CNG substitutions

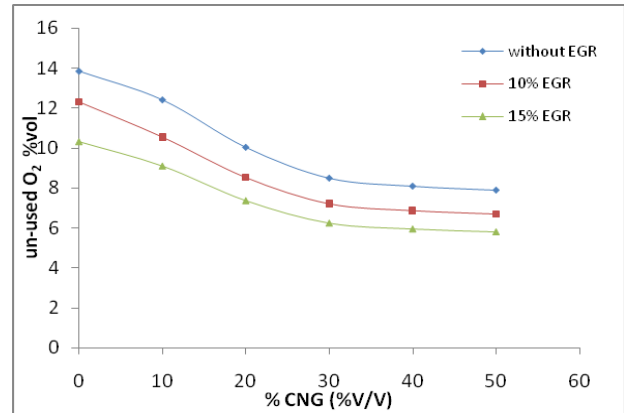


Figure 9: Un-used Oxygen Vs Brake power at various CNG substitutions

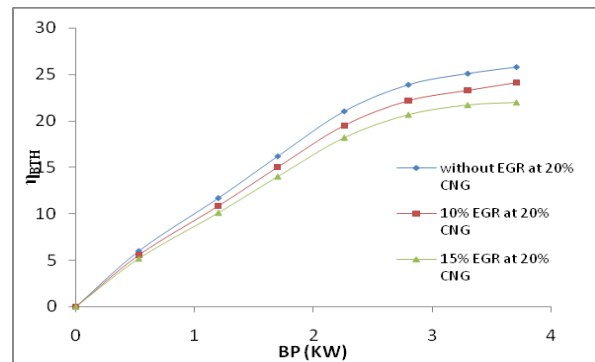


Figure 10: Brake Thermal Efficiency Vs Brake Power at Various Substitution of CNG

REFERENCES

1. John B. Heywood, *Internal Combustion Engine Fundamentals*. New York: McGraw-Hill Book Company, 1988
- [2] J. Barata, “Performance and emissions of a dual fueled DI diesel engine,” *SAE International*, Paper 952364, 1995.
- [3] B. Sahoo, N. Sahoo and U.K. Saha, “Effect of engine parameters and type of gaseous fuel on the performance of dual fuel gas engines-A critical review,” *Renewable and Sustainable Energy Reviews*, vol. 13, no. 9, pp. 1151-1184, 2009.
- [4] V. Pirouzpanah and R. K. Sarai, “Reduction of emissions in an automotive direct injection diesel

engine dual fuelled with natural gas by using variable exhaust gas recirculation," *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering*, vol. 217, no. 8, pp.719-725, August 1, 2003.

[5] G. Rao, A. V. Sita Rama Raju, C. V. Mohan Rao, and K. Govinda Rajulu, "Experimental investigation of a single-cylinder, four-stroke diesel engine operating on the dual-fuel mode (LPG + Diesel)," *International Journal of Scientific Computing*, vol. 2, no. 2, pp. 145-152, 2008.

[6] V. Ayhan, A. Parlak, I. Cesur, B. Boru and A. Kolip, "Performance and exhaust emission characteristics of a diesel engine running with LPG," *International Journal of the Physical Sciences*, vol. 6, no.8, pp. 1905-1914, April, 2011.

[7] D. H. Qi, Y. Z. Bian, Z.Y. Ma, C. H. Zhang, and S. Q. Liu, "Combustion and exhaust emission characteristics of a compression ignition engine using liquefied petroleum gas–diesel blended fuel," *Journal of Energy Conversion Management*, vol. 48, no. 2, pp 500-509, 2007.

[8] Y. E. Mohamed, A. Selim, M. S. Radwanb, and H. E. Saleh, "Improving the performance of dual fuel engines running on natural gas/LPG by using pilot fuel derived from jojoba seeds," *Journal of Renewable Energy*, vol. 33, pp. 1173-1185, 2008.

[9] J. Miller, J. Nagarajan, and S. Renga Narayanan, "Experimental studies on homogeneous charge CI engine fueled with LPG using DEE as an ignition enhancer," *Journal of Renewable Energy*, vol. 32, no. 9, pp. 1581–1593, 2007

[10] V. Pradeep, R.P. Sharma, Use of HOT EGR for NOx control in a compression ignition engine fuelled with bio-diesel from *Jatropha* oil, *Renewable Energy* 32 (2007) 1136–1154, 30 April 2006

[11] Ming Zheng, Graham T. Reader, J. Gary Hawley, Diesel engine exhaust gas recirculation – a review on advanced and novel concepts, *Energy*

Conversion and Management 45 (2004) 883–900, 16 July 2003

[12] Tsolakisa, A. Megaritisb, D. Yapc, Application of exhaust gas fuel reforming in diesel and homogeneous charge compression ignition (HCCI) engines fuelled with biofuels, 14 June 2007

[13] A Text book on "Internal Combustion Engine" by R.K.Rajput-Laxmi publications

[14] D.T. Hountalasa, G.C. Mavropoulosa,, K.B. Binderb, Effect of exhaust gas recirculation (EGR) temperature for various EGR rates on heavy duty DI diesel engine. 10 December 2006.

[15] Azimov U, Tomita E, Kawahara N, Harada Y. PREMIER (Premixed Mixture Ignition in the End-gas Region) combustion in a natural gas dual-fuel engine: Operating range and exhaust emissions. *Int J Engine Research* 2011; 12:484-497.

[16] Mehrzad Kaiadi, *Diluted Operation of a Heavy-duty Natural Gas Engine*. Lund, 2011

[17] B. S. Brown, C. A. Laforet, S. N. Rogak, and S. R. Munsch, "Comparison of injectors for compression ignition of natural gas with entrained diesel", *International Journal of Engine Research*, vol. 12, 2011.

[18] Nafis Ahmad-I, M. K. Gajendra Babu, and A. Ramesh, "Experimental Investigations of Different Parameters Affecting the Performance of a CNG-Diesel Dual Fuel Engine", SAE 2005-01-3767, 2005.

[19] Jie Shen, Jun Qin, and Mingfa Yao, "Turbocharged diesel/CNG Dual-Fuel Engines with Intercooler: Combustion, Emissions and Performance", SAE 2003-01-3082, 2003.

[20] Seung Hyun Yoon and Chang Sik Lee, "Experimental investigation on the combustion and exhaust emission characteristics of biogas-diesel dual-fuel combustion in a CI engine", *Fuel Processing Technology*, vol. 92, 2011.

[21] Eiji Tomita, Nobuyuki Kawahara, Zhenyu Piao, and Ryoichi Yamaguchi, "Effects of EGR and Early Injection of Diesel Fuel on Combustion

Characteristics and Exhaust Emissions in a Methane Dual Fuel Engine", SAE 2002-01-2723, 2002.

[22] Y. Qi, S. R. Krishnan, H. Yang, and H. C. Midkiff, "Effect of hot exhaust gas recirculation on the performance and emissions of an advanced injection low pilot-injected natural gas engine", Int. J. Engine Res., vol. 8, 2006.

[23] Masahiro Shioji, Takuji Ishiyama, Makoto Ikegami, Shinichi Mitani, and Hiroaki Shibata, "Performance and Exhaust Emissions in a Natural-Gas Fueled Dual-Fuel Engine", JSME International Journal, vol. 44, no. 4, 2001.

[24] Manfred Amann, Terrence Alger, and Darius Mehta, "The Effect of EGR on Low-Speed Pre-Ignition in Boosted SI Engines", SAE 2011-01-0339, 2011.

[25] Thananchai Tepimonrat, Kittisak Kamsinla, Ekathai Wirojsakunchai, Tanet Aroonsrisopon, and Krisada Wannatong, "Use of Exhaust Valve Timing Advance for High Natural Gas Utilization in Low-Load Diesel Dual Fuel Operation", SAE 2011-01-1767, 2011.