

Performance Evaluation of Ant Colony Optimization Based Routing Algorithms for Mobile Ad Hoc Networks

Khushneet Kaur Batth¹, Rajeshwar Singh²

¹Ph.D. Research Scholar, Desh Bhagat University, Punjab, India

²Professor, Department of ECE,

Doaba Khalsa Trust Group of Institutions, Punjab, India

Abstract: *Mobile Ad Hoc Network is a collection of autonomous mobile nodes that communicate with each other over wireless links without any fixed infrastructure. The nodes use the service of other nodes in the network to transmit packets to destinations that are out of their range. Such networks are expected to play increasingly important role in future organizations, University, Civilian and Military settings, being useful for providing communication support where no fixed infrastructure exists. Also, in case of disaster or natural calamities, the deployment of a fixed infrastructure is neither feasible nor economically profitable for establishing communication among the rescue members. In order to accomplish this, a number of routing protocols are being proposed by researchers. Ants based routing is gaining more popularity because of its adaptive and dynamic nature. A number of Swarm Intelligence (SI) based, more specially Ant Colony Optimization (ACO) based routing algorithms are proposed by researchers. Each one is based on different characteristics and properties. In this paper, we take up three ACO based algorithms and simulate the proposed algorithms using NS-2 and compare the performance matrices as Packet Delivery Fraction (PDF), throughput and routing overhead for varying simulation time.*

Keywords –Ant Colony Optimization (ACO), Mobile Ad Hoc Networks (MANETs), Packet Delivery Fraction (PDF), Throughput.

Introduction

Swarm intelligence (SI) based, more specially Ant Colony Optimization (ACO) [1-15] based routing algorithms are novel evolutionary algorithms, which have the characteristics such as positive feedback, negative feedback, distributing computing, stigmergy etc. Swarm Intelligence based techniques like ACO and PSO are inspired from real biological insects like ants, bees, bats, elephants, birds to and is being applied by researchers to solve complex engineering problems. They possess following characteristics: Scalability – The population changes by local and distributed agent interactions. Fault tolerance - There is no centralized control for the agents, so they are able to sustain even in case of small failure in the links. Adaptation - The agents change, reproduce or die as per requirement in the colony. Speed - The

agents communicate very fast through pheromone and others follow. Modularity - Agents act independently. Autonomy – No supervision is needed because each agent follow simple rule. Parallelism – Agents perform the operations parallelly. Mobile Ad Hoc Networks (MANETs) are built up of a collection of mobile nodes which have no fixed infrastructure. The nodes communicate through wireless network and there is no central control for the nodes in the network. Routing is the task of directing data packets from a source node i.e. transmitter to a given destination node i.e. receiver. The surrounding physical environment significantly attenuates and distorts the radio transmissions since signal quality degrades with distance. Hence, it may be needed for one mobile node to take the assistance of other nodes in forwarding its packets to the desired destination. A node can move anytime in an ad hoc scenario and, as a result, such a network needs to have routing protocols which can adapt dynamically changing wireless topology. However, since there is no fixed infrastructure in a network, each mobile node operates not only as a node but also as a router, forwarding packets from one node for other mobile nodes in the network, that may not be within direct wireless transmission range of each other [8,9,15]. It is very challenging for the researchers and engineers to develop and implement a routing algorithm to accomplish the task of routing in changing topology of Mobile Ad Hoc Networks. Further, in this research paper, Section 2 comprises of review of ACO based routing algorithms for MANETs. In Section 3, we discuss experimental setup used for evaluation of performance matrices. In Section IV, we present the performance matrices and result analysis of ANTALG, Ant Chain and IACR algorithms, and Section V is presented with Conclusion.

2. Review of ACO based Routing Algorithms

Ad hoc Networking with Swarm Intelligence (ANSI) is a reactive algorithm which finds out path only when demanded that is, when node has data to send to other nodes it finds out the path [16]. The Multicast for Ad hoc Network with Swarm Intelligence (MANSI) protocol provides multicast support for Ad hoc Networks. Within a multicast group, each member launches a forward ant in order to find an existing forwarding node where it can be used to establish connectivity to the group with lower cost [17]. The Multicast for Ad hoc Network with hybrid Swarm Intelligence (MANHSI) utilizes small control packets equivalent to ants in the physical world. These packets, traveling like biological ants, deposit control information at nodes they visit similar to the way ants laying pheromone trails on the path [18]. Ants Hybrid Routing (ACO-AHR) Hybrid routing algorithm [19]. It introduces the service agents to reduce expense of network. It uses two artificial ant agents that is, forward ant agent which travels from source to destination and find out information about quality of the path. Backward ant agent travels from destination to source and collect information about pheromone deposited. There are other types of agent that is called service agent (sagent). Improved Ant Colony Optimization algorithm for mobile ad hoc network (PACONET) is a reactive algorithm. It is a very dynamic algorithm which takes into account the mobility, route maintenance, Link Failure-Handling [20]. Position based on Ant colony routing algorithm for MANETs. (POSANT) is reactive that is, route is established only when there are some data

to send. It is position based routing means each node has information about its own position, position of its neighbors, position of destination node [21]. Also, Swarm Intelligence: An emerging solution for Quality of Service (QoS) provisioning in Mobile Ad Hoc Networks is described in Singh et al.[22]. Probabilistic Ant Routing (PAR) is proposed for routing in MANET [23]. Each node maintains a list of neighbors according to HELLO MESSAGE received. Forward ant agents (FANT) are probabilistic and explore the network to collect network traffic information. They are routed on normal priority queue. If route to destination is available as present node, the FANT is uni-cast otherwise it is broadcasted. Saleem, Muhammad, Gianni A. Di Caro, and Muddassar Farooq in their paper Swarm Intelligence based routing protocol for wireless sensor networks: Survey and future directions [24], state extensive review of area of Swarm Intelligence especially with regard to Ant Colony Routing and Bee-Inspired routing protocols with regard to SI in WSN along with analysis of various issues surrounding SI based routing protocols and future directions to overcome these issues. Fatih, Ccedil; elik, Zengin Ahmet, and Tuncel Sinan in research paper - A survey on swarm intelligence based routing protocols in wireless sensor networks [25], mention various issues with regard to complexity, scalability and adaptability issues and comprehensive review of routing protocols being proposed to solve these issues. Babu, K. Ashok, D. Sreenivasa Rao, and S. Lakshminarayana, in the research paper titled, Swarm Intelligence based Energy Efficient Routing Protocol for Wireless Ad-hoc Networks [26], define various energy efficient routing protocols based on Swarm Intelligence network and propose Ant Colony Optimization meta heuristic to overcome routing issues and proposes Energy Efficient Ant Based Routing Protocol for finding optimal paths between sender and sink nodes. Zungeru, Adamu Murtala, Li-Minn Ang, and Kah Phooi Seng, in their paper - Classical and swarm intelligence based routing protocols: A survey and comparison [27], mention comprehensive review of classical to swarm intelligence based routing protocols based on complexity, structure and energy efficiency along with a proper comparison of protocols cum Simulation of these protocols on MATLAB based Simulator for determining performance metrics. Chandra Mohan, B., and R. Baskaran in a paper titled - A survey: Ant Colony Optimization based recent research and implementation on several engineering domain [28], present review of various research and implementations of ACO and proposed a modified ACO model which overcomes various routing issues as compared to other traditional ACO algorithms. Shtovba, S. D. in paper - Ant algorithms: theory and applications [29], explain theory and applications of ant algorithms and various new methods of discrete optimization on the simulation of self-organized colony of biologic ants; travelling salesman problem on basis of combinatorial optimization and various methods for improvising ant algorithms. Al Salami, Nada MA in their paper, Ant colony optimization algorithm [30] propose hybrid algorithm for solving various combinatorial optimization problem via usage of ant colony and genetic programming and to propose various effective solutions for organized networks. Dorigo, Marco, Mauro Birattari, and Thomas Stutzle in paper, Ant colony optimization, [31] describe in detail the concept of ACO along with its variants, various theoretical results survey along with various other research issues. Yan, Jian-Feng, Yang Gao, and Lu Yang in research paper - Ant colony optimization for wireless sensor networks routing [32] state heuristic way for reducing energy consumption in routing and highlights three ACO Algorithms: Ant

System, Ant Colony System and Improved AS and doing comparison among three via simulation to highlight reduction in energy consumption. Dorigo, Marco, and Christian Blum in research paper, Ant colony optimization theory: A survey [33] describe in detail concept of ACO along with relations between ACO optimization algorithms and other approximation methods. Monteiro, Marta SR, Dalila BMM Fontes, and Fernando ACC Fontes in research paper, Ant Colony Optimization: a literature survey [34], define ACO along with its various algorithms to determine the behavior of natural ants. Rault, Tifenn, Abdelmadjid Bouabdallah, and Yacine Challal in research paper, Energy efficiency in wireless sensor networks: A top-down survey [35], highlight in detail the issue of energy efficiency in WSN along with survey of various energy conservation schemes to enhance network lifetime. Ali, Zulfiqar, and Waseem Shahzad in research paper, Analysis of Routing Protocols in AD HOC and Sensor Wireless Networks Based on Swarm Intelligence [36], mention critical analysis of comparison of routing protocols of AdHoc and Swarm Intelligence in terms of routing overhead, route optimality and energy consumption. Okdem, Selcuk, and Dervis Karaboga in research paper, Routing in wireless sensor networks using ant colony optimization [37], define a new routing scheme and adapted ant colony optimization (ACO) algorithm and results are tested via Proteus Simulation Program. S Kannan, TKalaikumar, S Karthik, V P Arunachalam, proposed MAARA (MULTIAGENT ANT BASED ROUTING ALGORITHM) [38] which is a hybrid algorithm that combines ant algorithm and multi agent systems. The algorithm is simulated over ns 2 and the results are better than AODV, DSR, ANTHOCNET, in terms of delay, packet delivery ratio, more connectivity, and less packet loss. Sehi, Siba K Udgata, "Efficient ant routing protocol for MANET proposed an ANT-E : EFFICIENT ANT ROUTING PROTOCOL [39]. The paper shows a protocol which is reactive and multipath routing that combines blocking expanding ring search (blocking ERS) with ACO. The protocol can be simulated with NS2. It out performs AODV and DSR in terms of packet delivery ratio, reliability, overheads, end to end delay etc. There are three types of overheads in the protocols, Data packets, control packets (FANT and BANT) and neighbor control packets (broadcast hello messages). Also birth and arrival time is measured. The algorithm has following phases: Route Discovery Phase: The phase is to create new paths. The source can disseminate Forward ant with destination node address, next hop and pheromone value, to its one hop neighbors. The neighbors forward FANTS to their neighbors until a route is found by blocking ERS. Otherwise source is informed by reply message. Duplicate FANTS are discarded because of unique sequence number, loops are avoided by buffering route requests, duplicate packets are discarded based on sequence number and source address. When ant reaches at destination backward ant is created to retrace the path in backward direction. The second phase is Route Maintenance Phase: Established paths do not maintain same pheromone value. When a data packet is relayed on path, it increases pheromone on path by 1 unit and strengthen the paths. The pheromone exploration takes place side by side. The next is Route Failure Handling: If the node gets a route error message (rerr) for a certain link, it deactivates The Link By setting The Pheromone Value to 0. The node searches for alternate link if packet does not reach the destination then source initiates a new routs discovery phase. The unsuccessful packets are retransmitted by intermediate nodes when they receive NACK from receiver node.

Ashima Rout, Srinivas Sethi, Debajyoti Mishra in the research paper [40] discussed ant based routing protocol to optimize the route discovery and maximize the efficiency of routing in terms of packet delivery ratio (PDR) using the blocking expanding ring search (Blocking-ERS), third party route reply, local route repair and n-hop local ring techniques. These techniques control the overhead and minimize the end-to-end delay with improvement of PDR. The Optimized-Ant routing protocol is based on Ad Hoc On-Demand distance Vector (AODV) and inspired by the Ant-Colony Optimization (ACO) used to solve complex optimization problems and utilizes a collection of mobile agents as ANTS to perform optimal routing activities. D Shivakumar and S Ganeshan proposed a new On-Demand Ant-based Multiagent Routing Algorithm (ODAMRA) [41] for Mobile Ad hoc Networks (MANETs), which combines the on-demand routing capability of Ad hoc On-demand Distance Vector (AODV) with some modifications in the existing ant colony optimization mechanism using ant-like mobile agents. In the conventional AODV algorithms, the actual communication is to be delayed until the route is determined. Therefore, this is not suitable for real-time data as well as multimedia communication applications. The proposed algorithm provides high connectivity, reducing the number of route discoveries before starting new connections. Hence, this may lead to elimination of the delay before starting the actual communication and it can be suitable for real-time communication in MANETs. Zheng-Yu Wul, and Han-Tao Song in research paper titled Ant-based Energy-aware Disjoint Multipath Routing Algorithm for MANETs [42] present a novel approach called ant-based energy-aware disjoint multipath routing algorithm (AEADMRA). It is based on swarm intelligence and especially on the ant colony-based meta heuristic. It can discover multiple energy-aware node-disjoint routing paths with a low routing overhead. Authors use combination of Swarm Intelligence and node-disjoint multipath routing to overcome the problems of routing in MANETs. R. Ramesh Kumar, A. Damodaram in research paper titled A Novel on Demand Ant Based Security Alert Routing Algorithm for MANET in Grid Environment [43] present on Demand Ant based security alert routing Algorithm (ODASARA) for mobile adhoc networks in grid environment, which combines the on-demand routing capability of Ad Hoc On-Demand Distance Vector (AODV) routing protocol with a Ant Colony Optimization mechanism using ant like mobile agents.

Gurpreet Singh, Neeraj Kumar and Anil Kumar Verma in their research paper "ANTALG: An Innovative ACO based Routing Algorithm for MANETs " conclude that MANETs have been used in wide areas of applications such as disaster management, video transmissions, secure communication etc. Due to the constant topological changes, it is a challenging task to route the packets to their final destination in MANETs. Keeping in view of the same, propose a new Innovative ACO based Routing Algorithm (ANTALG) which has considered the random selection of source and destination node and exchanges the Ants (agents) between them. In general, ANTALG algorithm operates using reinforcement learning to define a model of optimal routing behavior in MANETs. In such a model, optimal behavior is not merely searching shortest-hop paths, but also considers the quality of the links which make up those paths. The learning strategy that designed is based on Ant Colony Optimization (ACO) algorithms. It has some of the unique features. They find the ANTALG has better performance in comparison to HOPNET, AODV

and ADSR protocols as shown in the results section using various performance evaluation metrics [44], We consider this ANTALG routing algorithm as one of the ACO based algorithm for performance evaluation in our research paper. Shanghong Peng, Simon X. Yang, Stefano Gregori and Fengchun Tian, in their research paper propose improved QoS for Routing. The proposed routing algorithm is energy and QoS-aware. It solves the multi-constrained routing problem in wireless sensor networks based on a biological evolution algorithm like ant colony optimization. The lightweight ants are used to find routing paths between the sensor nodes and the sink nodes, which are optimized in terms of distance, delay, packet loss, bandwidth, and energy levels. These special ants minimize communication loads and maximize energy savings, contributing the extended lifetime of the wireless sensor networks. The simulation results show that the IACR algorithm has good performances in different WSN scenarios[45]. We consider this proposed IACR algorithm as second ACO based algorithm for performance evaluation in our research paper. Niannian Ding and Peter X. Liu, in their research paper propose an ACO based Algorithm, They mention in their conclusion that the comparison of simulation results, Ant Chain algorithm can construct a more elegant routing path for a randomly deployed sensor network. It provides the least total cost and relatively better positioning for each node. The centralized optimization provides an energy-efficient solution to the applications in which the base station is not far away. In addition, the advantages of the Ant Chain algorithm become more evident when sensor nodes are more sparsely distributed, in which case, it can not only provide a longer lifetime, but also show much higher reliability. Ant Chain algorithm is able to provide a flexible, reliable and energy-efficient data-gathering and communication solution to sensor networks, especially for civilian applications that require low cost, steady performance and high data quality [46]. We considered this Ant Chain algorithm as an ACO based algorithm as third paper for performance evaluation in this paper.

3. Experimental setup

The experimental setup is used for performance evaluation of these three ACO based ANTALG, Ant Chain and IACR routing algorithms. It measures the ability of protocols to adapt to the dynamic network topology changes while continuing to successfully deliver data packets from source to their destinations. In order to measure this ability, different scenarios are generated by varying the number of nodes. We use following scenario generation commands for generating cenario file:

```
./setdest -v 1 -n 20 -p 2.0 -M 10.0 -t 200 -x 500 -y 500; ./setdest -v 1 -n 50 -p 2.0 -M 10.0 -t 200 -x 500 -y 500; ./setdest -v 1 -n 80 -p 2.0 -M 10.0 -t 200 -x 500 -y 500; ./setdest -v 1 -n 100 -p 2.0 -M 10.0 -t 200 -x 500 -y 500.
```


Similarly, for connection pattern generation we use, cbrgen.tcl file. By using following commands the connection pattern is generated:

```
ns cbrgen.tcl -type cbr -nn 20 -seed 1.0 -mc 16 -rate 4.0; ns cbrgen.tcl -type cbr -nn 50 -seed 1.0 -mc 16 -rate 4.0; ns cbrgen.tcl -type cbr -nn 80 -seed 1.0 -mc 16 -rate 4.0; ns cbrgen.tcl -type cbr -nn 100 -seed 1.0 -c 16 -rate 4.0;
```

The trace file is created by each run and is analyzed using a variety of scripts, particularly one called file *.tr that counts the number of successfully delivered packets and the length of the paths taken by the packets, as well as additional information about the internal functioning of each scripts executed. This trace file is further analyzed with AWK file and Microsoft Excel is used to produce the graphs.

Simulations are run by considering three ACO based ANTALG, Ant Chain and IACR routing algorithms. In order to get realistic performance, the results are averaged for a number of scenarios. We tried to measure the protocols performance on a particular terrain area of 500m x 500m from real life scenario at a speed of 10 m/s. The simulation time was taken to be of 25, 50, 75, 100, 125 and 150 seconds for Constant Bit Rate (CBR) traffic type with a packet size of 512 Byte. Also, we have considered nodes with Omni-Antenna and Two Ray Ground Radio Propagation method. Simulation parameters are appended in

Table-1.

Table: 1. Simulation Parameters

Parameter	Value
Simulator	NS-2
Protocols studied	ANTALG, Ant Chain and IACR
Simulation time	25, 50, 75, 100, 125 and 150 seconds
Simulation area	500 x 500
Transmission range	250 m
Node movement model	Random waypoint
Traffic type	CBR (UDP)
Data payload	512 Bytes / packet

4. Performance Metrics and Result Analysis

In this paper, we have considered Packet Delivery Fraction (PDF), throughput in Bytes per second, and percentage routing overheads for evaluation of ANTALG, Ant Chain and IACR routing protocols. The simulation results obtained with the above mentioned simulation parameters are appended in Table-2,3 and 4. The graph showing comparison between ANTALG, Ant Chain and IACR is shown in Figure.1, 2 and 3.

4.1 Packet Delivery Fraction (PDF).

It is the ratio of the data packets delivered to the destinations to those generated by the sources.

Packet Delivery Fraction (PDF) = Total Packets Delivered to destination / Total Packets Generated.

Mathematically, it can be expressed as:

$$P = \frac{1}{c} \sum_{f=1}^e \frac{R_f}{N_f}$$

Where, P is the fraction of successfully delivered packets, C is the total number of flow or connections, f is the unique flow id serving as index, R_f is the count of packets received from flow f and N_f is the count of packets transmitted to f.

Table.2: Packet Delivery Fraction with varying Simulation Time.

Simulation Time	Ant Chain	IACR	ANTALG
25	87.20004444	95.03	90.64801
50	86.69843213	96.94	89.69489
75	83.17194855	98.65	82.2692
100	84.55499789	99.13	82.8119
125	84.09200578	92.56	80.30566
150	85.63825949	91.26	78.6672

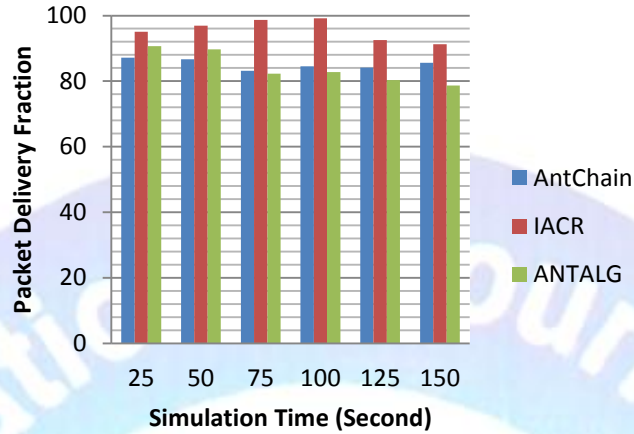


Fig.1: Packet Delivery Fraction of Ant Chain, IACR and ANTALG.

4.2 Throughput

Throughput of the routing protocol means that in certain time the total size of useful packets that received at all the destination nodes. The unit of throughput is MBytes/s, however we have taken bytes per second. The throughput values obtained for the simulation parameters of table-1 is tabulated in table-3. The graph shown in fig.2 indicates the throughput comparison of ACO based routing algorithms Ant Chain, IACR and ANTALG.

Table.3: Throughput (Bytes/sec) with varying Simulation Time.

Simulation Time	Ant Chain	IACR	ANTALG
25	85551	86271	86271
50	85983	84862	84862
75	85179	86167	86167
100	84530	86433	86433
125	84049	84826	84826
150	81914	86662	86662

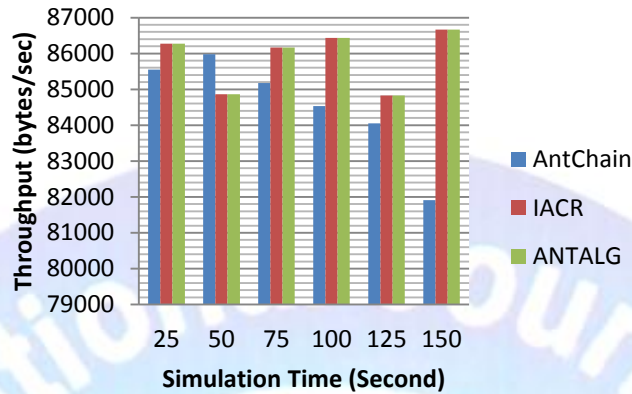


Fig.2: Throughput of Ant Chain, IACR and ANTALG

4.3 Routing Overhead

Routing Overhead of the routing protocol means Ratio of number of control packets to number of messages sent. Nodes typically have low computational capability and memory, and could not support diffusion communication which is widely deployed in the wired networks. For example, distance-vector routing protocol uses the Bellman-Ford algorithm and link-state protocol use the Dijkstra's algorithm to calculate shortest (lowest cost) paths. So not only the network bandwidth consumed by the routing messages must be considered, but also how much processing power and memory is required in the nodes. The Routing Overhead values obtained for the simulation parameters of table-1 is tabulated in table-4. The graph shown in fig.3 indicates percentage routing overhead of ACO based routing algorithms Ant Chain, IACR and ANTALG

Table.4 Percentage Routing Overhead with varying Simulation Time.

Simulation Time	Ant Chain	IACR	ANTALG
25	8.157099491	5.955865	5.039928
50	7.888970695	6.216364	6.709233
75	7.964017681	6.20422	7.466405
100	7.850341975	5.763572	7.748653
125	7.910766565	6.643968	7.140962
150	7.820066869	6.354983	5.629428

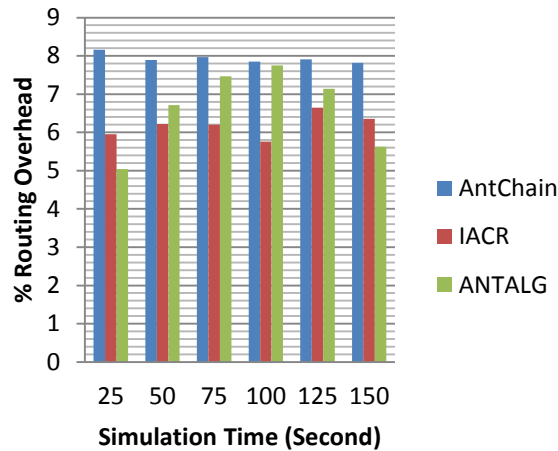


Fig.3: Percentage Routing Overhead of Ant Chain, IACR and ANTALG

5. Conclusion

In this paper we have compared the performance of ACO based Ant Chain, IACR and ANTALG routing algorithms for routing using NS-2 event simulator keeping packet size of 512 Byte. It is found that ACO based IACR Routing Algorithm performs best for packet delivery fraction for increasing simulation time. However, PDF decreases with much increase in simulation time. For low simulation time ANTALG provides better PDF than Ant Chain Algorithms, however for higher simulation time PDF of ANTALG worsens. Therefore, it can be concluded that in terms of performance matrix Packet Delivery Fraction, IACR is to be preferred. Throughput for ACO based IACR and ANTALG is better than Ant Chain routing Algorithms. Also, throughput worsens for Ant Chain routing Algorithm for larger simulation time. Routing overhead is also very high for Ant Chain routing algorithms. ANTALG also has higher routing overhead than IACR but less than Ant Chain. But average routing head for varying simulation time it is found that IACR performs better than ANTALG. The observation from the experiments on Ant Chain, IACR and ANTALG, with an increase in simulation time for a fixed number of nodes and area of 500m x 500m illustrates that even if the terrain area of the network scenario is kept constant, the behavior of these routing protocols changes. It has also been found that the overall performance of IACR routing protocol for performance matrices, Packet Delivery Fraction as well as Throughput is better than that of ANTALG and Ant Chain routing protocols. In our experimental evaluation, we have taken up comparison of Ant Chain, IACR and ANTALG algorithms with varying simulation time. We shall consider the comparison of Ant Chain, IACR and ANTALG by varying packet size and number of nodes.

Acknowledgment:

We shall be very thankful to referee's comments for their valuable and helpful suggestions. Also, we are thankful to CMU Monarch Project Group for providing Wireless and Mobility Extensions to NS-2 Simulator.

References:

- [1]. Dorigo, M., Birattari, M., & Stutzle, T. (2006). Ant colony optimization. *IEEE computational intelligence magazine*, 1(4), 28-39.
- [2]. Yaseen, S. G., & Al-Slamy, N. M. (2008). Ant colony optimization. *IJCSNS*, 8(6), 351.
- [3]. Stützle, T. (2009, April). Ant colony optimization. In *International Conference on Evolutionary Multi-Criterion Optimization* (pp. 2-2). Springer Berlin Heidelberg.
- [4]. Dorigo, M., & Blum, C. (2005). Ant colony optimization theory: A survey. *Theoretical computer science*, 344(2), 243-278.
- [5]. Dorigo, M., & Stützle, T. (2003). The ant colony optimization metaheuristic: Algorithms, applications, and advances. In *Handbook of metaheuristics* (pp. 250-285). Springer US.
- [6]. Blum, C. (2005). Ant colony optimization: Introduction and recent trends. *Physics of Life reviews*, 2(4), 353-373.
- [7]. Sim, K. M., & Sun, W. H., "Ant colony optimization for routing and load-balancing: survey and new directions", *IEEE Transactions on Systems, Man, and Cybernetics-Part A: Systems and Humans*, 33(5), 2003, pp 560-572.
- [8]. Nayyar, A., & Singh, R. "Ant Colony Optimization—Computational swarm intelligence technique". In *Computing for Sustainable Global Development (INDIACom)*, 2016 3rd International Conference, 2015, pp. 1493-1499). IEEE.
- [9]. Khushneet Kaur, Rajeshwar Singh, "Swarm Intelligence for Routing in Mobile Ad Hoc Networks" *International Journal of Advanced Information Science and Technology (IJAIST) ISSN: 2319:2682, Vol.4, No.2, December 2016, .*
- [10]. Lu Guoying, Liu Zemin, Zhou Zheng. A distributed QoS routing algorithm based on ant-algorithm. *JOURNAL OF CHINA INSTITUTE OF COMMUNICATIONS*, 2001, 22(9):34-42.
- [11]. Marwaha S, Chen Kong Tham, Dipti Srinivasan, "A Novel Routing Protocol using Mobile Agents and Reactive Route Discovery for Ad-hoc Wireless Networks, Toward Network Superiority", *Proceedings of IEEE International Conference on Networks 2002 (ICON 2002)*, August 27-30. pp 311-316, 2002.
- [12]. Lu Guoying, Liu Zemin, Zhou Zheng. Multicast routing based on ant algorithm for delay-bounded and load-balancing traffic. *LCN 2000. Proceedings. 25th Annual IEEE Conference on 8-10 Nov. 2000* Page(s):362-368.
- [13]. Guoying Lu, Zemin Liu. Multicast routing based on ant-algorithm with delay and delay variation constraints. *IEEE APCCAS 2000. The 2000 IEEE Asia-Pacific Conference on 4-6 Dec. 2000* Page(s):243-246.
- [14]. Zhang Subing, Liu Zemin. A QoS routing algorithm based on ant algorithm. *Communications, 2001. ICC 2001. IEEE International Conference on Volume 5, 11-14 June 2001* Page(s):1581-1585.
- [15]. Singh Rajeshwar, D K Singh, Lalan Kumar. "Swarm Intelligence Based Routing in Mobile Ad Hoc Networks : An Overview" , *National Journal of Technology, PSG Tech. ISSN-0973-1334 Vol.5 No.2 Jun 2009.*

- [16]. Rajagopalan S, Shen C "ANSI: A swarm intelligence-based unicast routing protocol for hybrid ad hoc networks", Journal of Systems Architecture, ELSEVIER.
- [17]. Martin Roth, Stephen Wicker . "Termite: A Swarm Intelligent Routing Algorithm for Mobile Wireless Ad-Hoc Networks", Report on Routing Algorithms, Wireless Intelligent Systems Laboratory, Cornell University, Ithaca, New York, USA, 2005.
- [18]. Zeyad M, Alfawaer GuiWei Hua, Noraziah Ahmed. "A Novel Multicast Routing Protocol for Mobile Ad Hoc Networks", Ame. J.Applied Sci., 4 (5): 333-338, 2007
- [19]. Wan-Jun Yu, Guo-Ming Zuo, Qianq-Qian Li, "Ant Colony Optimization For Routing In Mobile Ad Hoc Networks", Proceedings of the Seventh International Conference on Machine Learning and Cybernetics, Kunming, pp 1147-1151, Jul 2008.
- [20]. Eseosa Osagie, Parimala Thulasiraman and Ruppa K Thulasiram "PACONET: imProved Ant Cocony Optimazation Routing algorithm for Mobile Ad Hoc Networks", 22nd International conference on advanced information networking and applications, pp 204-211, 2008.
- [21]. Kamali Shahab, Jaroslav Opatrny "A Position Based Ant Colony Routing Algorithm for Mobile Ad hoc Networks", J. Networks 3 (4), Academy Publisher, Apr. 2008.
- [22]. Singh Rajeshwar, D K Singh, Lalan Kumar (2010). "Swarm Intelligence : An emerging solution for QOS in Mobile Ad Hoc Networks" , International Journal of Graphics Era University, ISSN No. 0975-1416, Vol 1, No.2, Sep 2009.
- [23]. Prasad SP, Singh YP, Rai CS (2009). "PAR: Probabilistic Ant Routing", Intern. J. Recent Trends. Engg., May 2009.
- [24]. Saleem, Muhammad, Gianni A. Di Caro, and Muddassar Farooq. "Swarm intelligence based routing protocol for wireless sensor networks: Survey and future directions." Information Sciences 181.20 (2011): 4597-4624.
- [25]. Fatih, Ccedil; elik, Zengin Ahmet, and Tuncel Sinan. "A survey on swarm intelligence based routing protocols in wireless sensor networks." International Journal of Physical Sciences 5.14 (2010): 2118-2126.
- [26]. Babu, K. Ashok, D. Sreenivasa Rao, and S. Lakshminarayana. "Swarm Intelligence based Energy Efficient Routing Protocol for Wireless Ad-hoc Networks." International Journal of Computer Applications 62.2 (2013).
- [27]. Zungeru, Adamu Murtala, Li-Minn Ang, and Kah Phooi Seng. "Classical and swarm intelligence based routing protocols for wireless sensor networks: A survey and comparison." Journal of Network and Computer Applications 35.5 (2012): 1508-1536.
- [28]. Chandra Mohan, B., and R. Baskaran. "A survey: Ant Colony Optimization based recent research and implementation on several engineering domain." Expert Systems with Applications 39.4 (2012): 4618-4627.
- [29]. Shtovba, S. D. "Ant algorithms: theory and applications." Programming and Computer Software 31.4 (2005): 167-178.
- [30]. Al Salami, Nada MA. "Ant colony optimization algorithm." UbiCC Journal 4.3 (2009): 823-826.
- [31]. Dorigo, Marco, Mauro Birattari, and Thomas Stutzle. "Ant colony optimization." Computational Intelligence Magazine, IEEE 1.4 (2006): 28-39.
- [32]. Yan, Jian-Feng, Yang Gao, and Lu Yang. "Ant colony optimization for wireless sensor networks routing." Machine Learning and Cybernetics (ICMLC), 2011 International Conference on. Vol. 1. IEEE, 2011.

- [33]. Dorigo, Marco, and Christian Blum. "Ant colony optimization theory: A survey." *Theoretical computer science* 344.2 (2005): 243-278.
- [34]. Monteiro, Marta SR, Dalila BMM Fontes, and Fernando ACC Fontes. "Ant Colony Optimization: a literature survey." *FEB Research Journal* (2012).
- [35]. Rault, Tifenn, Abdelmajid Bouabdallah, and Yacine Challal. "Energy efficiency in wireless sensor networks: A top-down survey." *Computer Networks* 67 (2014): 104-122.
- [36]. Ali, Zulfiqar, and Waseem Shahzad. "Analysis of Routing Protocols in AD HOC and Sensor Wireless Networks Based on Swarm Intelligence." *International Journal of Networks and Communications* 3.1 (2013): 1-11.
- [37]. Okdem, Selcuk, and Dervis Karaboga. "Routing in wireless sensor networks using ant colony optimization." *Adaptive Hardware and Systems, 2006. AHS 2006. First NASA/ESA Conference on. IEEE, 2006.*
- [38]. S Kannan , TKalaikumaran, S Karthik, V P Arunachalam "Ant colony optimization for routing in mobile adhoc networks" *International Journal of Soft Computing* 5(61) 223-228, 2010.
- [39]. Srinivas Sehi, Siba K Udgata, "Efficient ant routing protocol for MANET" *International journal of computer science and engineering*, vol. 2 no. 7, pages 2414-2420, 2010,
- [40]. Ashima Rout, Srinivas Sethi, Debajyoti Mishra "Optimized ant based routing protocol for MANET, Proceedings, International Conference on Communication, Computing & Security, ACM New York, USA, 2011.
- [41]. D. Sivakumar and S. Ganesan A New On-Demand Ant-Based Multiagent routing Algorithm for Mobile Ad Hoc Networks, *The IUP Journal of Information Technology*, Vol. VI, No. 4, pp. 17-26, December 2010.
- [42]. Zheng-Yu Wul, and Han-Tao Song "Ant-based Energy-aware Disjoint Multipath Routing Algorithm for MANETs" *computer Journals*, Vol 54, pp 166-176, May, 2011.
- [43]. R. Ramesh Kumar , A. Damodaram "ODASARA: "A Novel on Demand Ant Based Security Alert Routing Algorithm for MANET in Grid Environment, *IJCSNS International Journal of Computer Science and Network Security*, VOL.10 No.4, April 2010.
- [44]. Gurpreet Singh, Neeraj Kumar, Anil KumarVerma. "ANTALG:An Innovative ACO based Routing Algorithm for MANETs, Elsevier, *Journal of Network and Computer Applications (JNCA)*, 2014, pp 151–167.
- [45]. Shanghong Peng, Simon X. Yang, Stefano Gregori and Fengchun Tian, "An Adaptive QoS and Energy-Aware Routing Algorithm for Wireless Sensor Networks" *Proceedings of the 2008 IEEE, International Conference on Information and Automation, June 20 -23, 2008, Zhangjiajie, China, 2008.* pp 578-583.
- [46]. Niannian Ding and Peter X. Liu, "A Centralized Approach to Energy-Efficient Protocols for Wireless Sensor Networks", *Proceedings of the IEEE International Conference on Mechatronics & Automation Niagara Falls, Canada, July 2005*, pp 1636-1641.

Authors Profile



Khushneet Kaur Batth received her **B.E. and M.E** degree in *Electronics and Communication Engineering* from *Punjab Technical University, Jalandhar, Punjab*. She is presently working as *Research Scholar* at *Desh Bhagat University, Punjab*. Her research interests include *Mobile Ad hoc networks, Sensor Networks, Neural Networks,*

viewed Refereed Open Access International e-Journal - Included in the International Serial Directories

Aryabhata Journal of Mathematics and Informatics

<http://www.ijmr.net.in> email id- irjmss@gmail.com



Dr. Rajeshwar Singh is Ph.D. in Engineering from Department of Electronics and Communication Engineering, Faculty of Engineering, BIT Sindri, Dhanbad, Jharkhand. His Master of Engineering degree is in Electronics and Communication Engineering with specialization in Digital Systems from Motilal Nehru Regional Engineering College (currently NIT), Allahabad, U.P. He received his AMIE (India) degree in 1992 from The Institutions of Engineers, Calcutta. He has also received, Master of Business Administration (MBA) in Information Technology from MD University, Rohtak, Haryana. He has more than 25 years of experience in teaching and industry. He has published more than 60 papers in national and international journals / conferences of repute and four books in the field of Engineering and Technology. His research interests include Swarm Intelligence based Optimization (Energy, Security, Routing), Wireless Sensor Network, intellectual information technology, Mobile Ad hoc Network Routing, Coding theory, cryptography, e-Governance and Educational Planning.